

U.S. DEPARTMENT OF COMMERCE, PATENT AND TRADEMARK OFFICE		DATE: <u>24</u> May 2001 (<u>24</u> .05.2001)
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. APPL. NO. If known: <u>09/1856684</u> Not Yet Assigned
INTERNATIONAL APPLICATION NO.: PCT/FR99/02977	INTERNATIONAL FILING DATE: 01 December 1999 (01.12.99)	PRIORITY DATE CLAIMED: 01 December 1998 (01.12.98) 01 December 1998 (01.12.98)
TITLE OF INVENTION: METHOD AND APPARATUS FOR INCINERATING AND VITRIFYING WASTE, IN PARTICULAR RADIOACTIVE WASTE		
APPLICANT(S) FOR DO/EO/US: 1) BRUNELOT, Pierre, 2) LACOMBE, Jacques, 3) MERLIN, Serge, 4) ROUX, Patrice, 5) THIEBAUT, Valérie, 6) CHOI, Kwan-Sik, 7) SONG, Myung-Jae.		
Applicant hereby submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 USC 371(f)) The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)):</p> <p style="margin-left: 40px;">a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</p> <p style="margin-left: 40px;">b. <input type="checkbox"/> has been communicated by the International Bureau.</p> <p style="margin-left: 40px;">c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)</p> <p>6. <input checked="" type="checkbox"/> A English translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p style="margin-left: 40px;">a. <input type="checkbox"/> are attached hereto (required only if not transmitted by the International Bureau).</p> <p style="margin-left: 40px;">b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p style="margin-left: 40px;">c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p style="margin-left: 40px;">d. <input checked="" type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p>		
ITEMS 11 to 20 BELOW CONCERN OTHER DOCUMENT(S) OR INFORMATION INCLUDED:		
<p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter2 and 35 USC 1821 - 1825</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 USC 154(d)(4)</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 USC 154(d)(4)</p> <p>20. <input checked="" type="checkbox"/> Other items or information:</p> <p>TRANSMITTAL FORM; FEE CALCULATION; INTERNATIONAL PUBLICATION WO 00/32524; INTERNATIONAL PUBLICATION DATE 8 JUNE 2000; WITH ENGLISH TRANSLATION CONSISTING OF 19 PAGES INCLUDING; 11 PAGES TEXTUAL SPECIFICATION, 3 PAGES OF 15 CLAIMS; 1 PAGE OF THE ABSTRACT; 4 SHEETS DRAWINGS; ENGLISH TRANSLATION OF ANNEXES OF THE IPER; PRELIMINARY AMENDMENT TO ANNEXES WITH CLEAN COPY AND MARKED UP COPY; PCT/IPEA/416 NOTIFICATION OF TRANSMITTAL OF IPER; PCT/IPEA/409 IPER WITH ANNEXES (ENGLISH TRANSLATION INCLUDED); EXECUTED INVENTOR'S DECLARATION; ASSIGNMENT AND RECORDATION COVER SHEET; PCT/ISA/220 NOTIFICATION OF TRANSMISSION OF INTERNATIONAL SEARCH REPORT; PCT/ISA/210 INTERNATIONAL SEARCH REPORT; IDS TRANSMITTAL LETTER; INFORMATION DISCLOSURE STATEMENT; PTO FORM 1449 WITH 6 REFERENCES; PCT REQUEST; PCT/IB/301 NOTIFICATION OF RECEIPT OF RECORD COPY; PCT/IB/332 INFORMATION CONCERNING ELECTED OFFICES NOTIFIED OF THEIR ELECTION; PCT/IB/304 NOTIFICATION CONCERNING SUBMISSION OF PRIORITY DOCUMENT; PCT/IB/308.</p>		

U.S. APPLICATION NO. (if known) not yet assigned 097/856684	INTERNATIONAL APPLICATION NO. PCT/FR99/02977	DATE: <u>24</u> May 2001 <u>24</u> 05.2001)
--	---	---

17. <u>x</u> The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5): Search Report has been prepared by the EPO or JPO:.....\$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482).....\$690.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$1000.00 International preliminary examination fee (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4).....\$ 100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =	<u>CALCULATIONS</u> \$860.00 \$ 860.00	<u>PTO USE ONLY</u>
---	---	---------------------

Surcharge of \$130.00 for furnishing the oath or declaration later than <u> 20 </u> <u> 30 </u> months from the earliest claimed priority date (37 CFR 1.492(e)).	\$	
---	----	--

CLAIMS	NO. FILED	NO. EXTRA	RATE		
TOTAL	<u>15</u> -20=	0	X \$ 18.00	\$	0.00
INDEPENDENT	<u>2</u> - 3=	02	X \$ 80.00	\$	0.00
Multiple dependent claims(s) (if applicable)			+ \$260.00	\$	0.00
TOTAL OF ABOVE CALCULATIONS =				\$	860.00
Reduction by 1/2 for asserting small entity, if applicable. (Note 37 CFR 1.9, 1.27, 1.28).				\$	0.00
SUBTOTAL =				\$	860.00
Processing fee of \$130.00 for furnishing the English translation later than <u> 20 </u> <u> 30 </u> months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	0.00
TOTAL NATIONAL FEE =				\$	860.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$	40.00
TOTAL FEES ENCLOSED =				\$	900.00
				Amount to be:	
				refunded	\$
				charged	\$

Attorney Docket No. 24648

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

1)BRUNELOT, Pierre, 2)LACOMBE, Jacques, 3)MERLIN, Serge,
4)ROUX, Patrice, 5)THIEBAUT, Valérie, 6)CHOI, Kwan-Sik, 7)SONG, Myung-Jae
International Application No. PCT/FR99/02977

Serial No. NOT YET ASSIGNED

International Filing Date: 01 December 1999 (01.12.99)

Filed: May 24, 2001

For: **METHOD AND APARATUS FOR INCINERATING AND VITRIFYING WASTE, IN
PARTICULAR RADIOACTIVE WASTE**

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examining on the merits and calculating the filing
fee for the national phase application filed herewith, please enter
the following amendments:

IN THE CLAIMS:

Please amend the Article 34 annexed claims 3, 5, 6, 7, 8, 11,
12, 14 and 15 of the International Preliminary Examination Report
as per attached with this preliminary amendment.

REMARKS

The above amendments have been made to remove multiple
dependencies from the claims and to conform them to U.S. practice.
No new matter has been added. Pursuant to the new rules
implementing the AIPA, a clean copy of the amended claims and a
marked-up copy of the claims are attached.

Respectfully submitted,

NATH & ASSOCIATES PLLC

By: 

Gary M. Nath
Registration No. 26,965
Customer no. 20529

Date: May 24, 2001
NATH & ASSOCIATES PLLC
1030th Street, NW - 6th Floor
Washington, D.C. 20005
GMN/dd:AMENDpreml.AIPA

AMENDED CLAIMS - MARKED-UP COPY

CLAIMS

1. A method of processing organic waste (D) in divided solid and/or liquid form, the method being implemented in a single reactor (1) containing a bath of molten glass (V) surmounted by a gas phase (G), the method comprising incinerating said waste (D) in the presence of oxygen at the surface (S) of said bath of molten glass (V), and in vitrifying said incinerated waste (D) in said bath of molten glass (V), the method being characterized in that in addition to the oxygen or the oxygen-containing gas delivered as oxidizer into said gas phase (G), oxygen or oxygen-containing gas is also injected into said bath of molten glass (V) in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V); advantageously in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V) and also to subject said bath of glass (V) to moderate stirring; the means (8) used for said injection being cooled and arranged in such a manner that on ceasing said injection, they do not constitute a plug of glass at their open end.
2. The method according to claim 1, characterized in that said oxygen or oxygen-containing gas injected into said bath of glass (V) is introduced into said reactor (1) beneath the surface (S) of said bath of glass (V).
3. (amended) The method according to claim 1 [or claim 2], characterized in that it is implemented with cooling of the walls (3, 3') of said reactor (1) and/or of the means (5, 6), other than said means (8) for injecting oxygen or oxygen-containing gas into said bath of glass (V), introduced into said reactor (1) in said gas phase (G) and in said bath of glass (V), in particular for feeding said reactor (1) with said waste (D) and with oxidizer.
4. The method according to claim 3, characterized in that it is implemented with dual cooling of the device (5) for feeding said waste (D) to said reactor (1):
first cooling of its thickness and of its outside surface (50), designed to protect it from corrosion; and
second cooling of its inside surface (50'), designed to minimize the heat transferred to the incoming waste (D).
5. (amended) The method according to claim 3 [or claim 4], characterized in that said walls (3, 3') of said reactor (1) in contact with said gas phase (G) and/or said means

(5, 6) introduced into said reactor (1) in contact with said gas phase (G) are cooled by circulation of at least one cooling fluid maintained at a temperature that is higher than the dew point of said gas phase (G).

- 5 6. (amended) The method according to [any one of claims 1 to 5] claim 1, characterized in that said bath of glass (V) is heated by induction, by flame, by plasma torch, or by means of electrodes dipped therein.
7. (amended) The method according to [any one of claims 1 to 6] claim 1,
10 characterized in that it is implemented in a cold crucible heated by induction.
8. (amended) The method according to [any one of claims 1 to 7] claim 1, characterized in that it is implemented to process radioactive waste.
- 15 9. An apparatus for processing organic waste (D) in divided solid and/or liquid form by incineration and by vitrification, the apparatus comprising a reactor (1) associated with heater means (2) suitable for maintaining a bath of molten glass (V) in the bottom of said reactor (1), and fitted with:
 - means (4) for emptying out said bath of molten glass (V);
 - 20 - a device (5) for feeding said waste (D) to be incinerated and vitrified, said device (5) opening out above the surface (S) of said bath of molten glass (V);
 - means (6) for feeding oxygen or oxygen-containing gas, delivering said oxygen or said gas above the surface (S) of said bath of molten glass (V); and
 - at least one combustion gas outlet (7) provided in the top portion of said
 - 25 reactor (1) well above the surface (S) of said bath of molten glass (V);

the apparatus being characterized in that said reactor (1) is further equipped with means (8) for injecting oxygen or oxygen-containing gas into said bath of molten glass (V); said means (8) for injecting said oxygen or said gas into said bath of molten glass (V):

 - 30 being arranged in such a manner that on ceasing to be fed, they do not constitute a plug of glass at their open end; and
 - including at least one circuit (83 + 83') for circulating a cooling fluid within their structure.- 35 10. The apparatus according to claim 9, characterized in that said means (8) for injecting said oxygen or said gas into said bath of glass (V) are introduced into the bottom portion of said reactor (1) beneath the surface (S) of said bath of glass (V).

11. (amended) The apparatus according to claim 9 [or claim 10], characterized in that said means (8) for injecting said oxygen or said gas into said bath of glass (V) are disposed vertically, passing through the bottom of said reactor (1) and presenting an outlet (82) at 90° to their vertical axis.

12. (amended) The apparatus according to [any one of claims 9 to 11] claim 9, characterized in that the means introduced into said reactor (1), other than said means (8) for injecting said oxygen or said gas into said bath of molten glass (V), including said device (5) for feeding said waste (D), said means (6) for feeding oxygen or oxygen-containing gas include at least one circuit (51, 52; 61) for circulating a cooling fluid within their structure.

13. The apparatus according to claim 12, characterized in that said device (5) for feeding said waste (D) presents a structure that is tubular, being defined by an outside surface (50) and by an inside surface (50'), said structure including in the thickness thereof at least two circuits (51 and 52) for circulating cooling fluids, at least one of said circuits (51) being designed to cool said structure and said outside surface (50) of said feeder device (5), and at least another one of said circuits (52) being designed to cool said inside surface (50') of said feeder device (5).

14. (amended) The apparatus according to [any one of claims 9 to 13] claim 9, characterized in that the walls (3, 3') of said reactor (1) are of the double-walled type, to allow a cooling fluid to circulate.

15. (amended) The apparatus according to [any one of claims 9 to 14] claim 9, characterized in that said reactor (1) is a cold crucible, and in that said heater means (2) are means for induction heating.

AMENDED CLAIMS - CLEAN COPY

CLAIMS

1. A method of processing organic waste (D) in divided solid and/or liquid form, the method being implemented in a single reactor (1) containing a bath of molten glass (V) surmounted by a gas phase (G), the method comprising incinerating said waste (D) in the presence of oxygen at the surface (S) of said bath of molten glass (V), and in vitrifying said incinerated waste (D) in said bath of molten glass (V), the method being characterized in that in addition to the oxygen or the oxygen-containing gas delivered as oxidizer into said gas phase (G), oxygen or oxygen-containing gas is also injected into said bath of molten glass (V) in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V); advantageously in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V) and also to subject said bath of glass (V) to moderate stirring; the means (8) used for said injection being cooled and arranged in such a manner that on ceasing said injection, they do not constitute a plug of glass at their open end.
2. The method according to claim 1, characterized in that said oxygen or oxygen-containing gas injected into said bath of glass (V) is introduced into said reactor (1) beneath the surface (S) of said bath of glass (V).
3. (amended) The method according to claim 1, characterized in that it is implemented with cooling of the walls (3, 3') of said reactor (1) and/or of the means (5, 6), other than said means (8) for injecting oxygen or oxygen-containing gas into said bath of glass (V), introduced into said reactor (1) in said gas phase (G) and in said bath of glass (V), in particular for feeding said reactor (1) with said waste (D) and with oxidizer.
4. The method according to claim 3, characterized in that it is implemented with dual cooling of the device (5) for feeding said waste (D) to said reactor (1):
first cooling of its thickness and of its outside surface (50), designed to protect it from corrosion; and
second cooling of its inside surface (50'), designed to minimize the heat transferred to the incoming waste (D).
5. (amended) The method according to claim 3, characterized in that said walls (3, 3') of said reactor (1) in contact with said gas phase (G) and/or said means (5, 6)

introduced into said reactor (1) in contact with said gas phase (G) are cooled by circulation of at least one cooling fluid maintained at a temperature that is higher than the dew point of said gas phase (G).

5 6. (amended) The method according to claim 1, characterized in that said bath of glass (V) is heated by induction, by flame, by plasma torch, or by means of electrodes dipped therein.

10 7. (amended) The method according to claim 1, characterized in that it is implemented in a cold crucible heated by induction.

8. (amended) The method according to claim 1, characterized in that it is implemented to process radioactive waste.

15 9. An apparatus for processing organic waste (D) in divided solid and/or liquid form by incineration and by vitrification, the apparatus comprising a reactor (1) associated with heater means (2) suitable for maintaining a bath of molten glass (V) in the bottom of said reactor (1), and fitted with:

- means (4) for emptying out said bath of molten glass (V);
- 20 - a device (5) for feeding said waste (D) to be incinerated and vitrified, said device (5) opening out above the surface (S) of said bath of molten glass (V);
- means (6) for feeding oxygen or oxygen-containing gas, delivering said oxygen or said gas above the surface (S) of said bath of molten glass (V); and
- at least one combustion gas outlet (7) provided in the top portion of said
- 25 reactor (1) well above the surface (S) of said bath of molten glass (V);

the apparatus being characterized in that said reactor (1) is further equipped with means (8) for injecting oxygen or oxygen-containing gas into said bath of molten glass (V); said means (8) for injecting said oxygen or said gas into said bath of molten glass (V):

30 being arranged in such a manner that on ceasing to be fed, they do not constitute a plug of glass at their open end; and

including at least one circuit (83 + 83') for circulating a cooling fluid within their structure.

35 10. The apparatus according to claim 9, characterized in that said means (8) for injecting said oxygen or said gas into said bath of glass (V) are introduced into the bottom portion of said reactor (1) beneath the surface (S) of said bath of glass (V).

11. (amended) The apparatus according to claim 9, characterized in that said means (8) for injecting said oxygen or said gas into said bath of glass (V) are disposed vertically, passing through the bottom of said reactor (1) and presenting an outlet (82) at 90° to their vertical axis.

12. (amended) The apparatus according to claim 9, characterized in that the means introduced into said reactor (1), other than said means (8) for injecting said oxygen or said gas into said bath of molten glass (V), including said device (5) for feeding said waste (D), said means (6) for feeding oxygen or oxygen-containing gas include at least one circuit (51, 52; 61) for circulating a cooling fluid within their structure.

13. The apparatus according to claim 12, characterized in that said device (5) for feeding said waste (D) presents a structure that is tubular, being defined by an outside surface (50) and by an inside surface (50'), said structure including in the thickness thereof at least two circuits (51 and 52) for circulating cooling fluids, at least one of said circuits (51) being designed to cool said structure and said outside surface (50) of said feeder device (5), and at least another one of said circuits (52) being designed to cool said inside surface (50') of said feeder device (5).

14. (amended) The apparatus according to claim 9, characterized in that the walls (3, 3') of said reactor (1) are of the double-walled type, to allow a cooling fluid to circulate.

15. (amended) The apparatus according to claim 9, characterized in that said reactor (1) is a cold crucible, and in that said heater means (2) are means for induction heating.

4/PRTS

09/856684

1

JC18 Rec'd PCT/PTO 2 4 MAY 2001

METHOD AND APPARATUS FOR INCINERATING AND VITRIFYING
WASTE, IN PARTICULAR RADIOACTIVE WASTE

The present invention relates to a method and to apparatus for incinerating and vitrifying waste, in particular radioactive waste.

5 Said invention lies within the context of processing dangerous combustible waste for which it is appropriate to fix the ash in stable manner. To neutralize waste of that type, it has long been the practice to operate in two stages, each of said stages being implemented in an independent apparatus:

- 10 - a first step of incinerating said organic waste, in divided solid and/or liquid form, in an incinerator apparatus; and
- a second stage of fixing the ash recovered from said first stage, said second stage being implemented in suitable apparatus that contains a bath of glass maintained in the molten state.

15 Nevertheless, for several years, waste processing methods have been described in which said two stages of incinerating said waste and fixing the resulting ash have been implemented in a single apparatus. In this context, a term that is used is "direct vitrification".

20 Results obtained in said context by the Applicants have been described in particular at the "Korean Atomic Industrial Forum" (KAIF) '98, which was held April 14 to 17, 1998 in Seoul, South Korea. Said results demonstrated the feasibility of a direct vitrification method, in which the waste is burned for the most part at the surface of a bath of molten glass, in an oxidizing atmosphere, with the ash that is generated being trapped and fixed in said bath of molten glass; since said method was implemented in a cold crucible, said bath of molten glass
25 was heated by induction.

Continuing their work on direct vitrification, the Applicants have designed and developed the present invention which can be considered as being an improvement of said direct vitrification as presently known. The improvement which constitutes the main subject matter of the present invention can be thought
30 of both in terms of a method and in terms of apparatus, and it involves the quality of the bath of glass. Said improvement which, in order to clarify the present description, can be referred to as the "main" improvement, is advantageously implemented with other improvements that, in the same spirit, can be referred to as "secondary" improvements. Said main and secondary improvements are

described below in general terms and then in greater detail with reference to the accompanying figures.

Thus, in a first aspect, the present invention provides a method of processing organic waste (i.e. combustible waste) in divided solid form (to facilitate insertion and combustion) and/or in liquid form, the method being implemented in a single reactor containing a bath of molten glass surmounted by a gas phase; said processing method comprising: incinerating said waste in the presence of oxygen at the surface of said bath of molten glass (said waste falling onto said surface, decomposing thereon, and the resulting gaseous products of said decomposition being burned in said oxygen-containing gas phase); and vitrifying said incinerated waste in said bath of molten glass. In this respect, the method of the invention is a direct vitrification method.

In characteristic manner, said method further comprises injecting oxygen into said bath of molten glass, in sufficient quantity to minimize or to avoid any formation of metal within said bath of glass; advantageously, in sufficient quantity to minimize or to avoid any formation of metal within said bath of glass and to subject bath of glass to moderate stirring.

Said oxygen which is introduced in original manner into the bath of molten glass is introduced into the process reactor in addition to the oxygen being delivered in conventional manner as oxidizer into the gas overlying said bath, in order to ensure that the waste is incinerated.

In characteristic manner, in the context of the method of the invention, not only does said oxidizer in the gas phase react, but so also does the oxygen within the bath of glass, said oxygen serving to adjust the oxidation-reduction (redox) potential of said bath of glass (thus serving to limit the reducing nature of the glass).

By controlling the redox potential of the bath of glass in this way, it is possible within said bath of glass to prevent oxides being reduced and thus to prevent metals being formed. The presence of such metals within said bath is very harmful to the uniformity of said bath, and thus to the quality of the vitrification obtained. In addition, the presence of metal can give rise to real difficulties when performing heating by induction

The oxygen injected into the bath of glass to minimize or even to avoid the formation of metal is advantageously injected in sufficient quantity also to ensure that said bath of glass is stirred somewhat. The person skilled in the art knows

how to optimize the quantity of oxygen required for these purposes. In any event, the quantity must be sufficient to obtain the desired effect concerning the value of the redox potential, and indeed the desired effects concerning the value of said potential and also the looked-for stirring effect, but it must not be excessive, insofar as the bath of glass while being stirred and mixed must nevertheless remain a bath of glass and must not be transformed into a foam ...

Oxygen has been mentioned as the oxidizer involved in the gas and as the oxidant gas introduced into the bath of glass, and this is appropriate insofar as said oxygen is generally delivered as a "pure" gas. Nevertheless, it is not entirely beyond the scope of the present invention to use a gas that contains oxygen, and in particular to use air, optionally enriched in oxygen, as the oxidizer and as the oxidant gas.

The oxygen delivered as oxidizer into the gas phase is advantageously optimized for the incineration in question, so as to be present in a quantity that is greater than the theoretically required stoichiometric quantity. Advantageously, this oxygen is present in a quantity that lies in the range 1.25 to 1.5 times said stoichiometric quantity. Nevertheless, said quantity is controlled and does not interfere with the negative pressure that is maintained within the reactor in conventional manner for obvious safety reasons. Said negative pressure is maintained by sucking out the combustion gases, where said suction is implemented under conditions such as to minimize the amount of waste, and above all the amount of ash, that is entrained.

Once the principle of the main improvement provided by the invention to the direct vitrification method has been accepted (i.e. the principle of injecting oxygen into the bath of glass), the way in which it is implemented can be subject to several variants, in contexts that are somewhat different.

In particular, the method of the invention can be implemented with a bath of glass that is practically pre-constituted (i.e. present in the reactor before the waste is introduced therein), or with a bath of glass that is constituted progressively from some minimum initial fill. In this second variant, which is preferred, the reactor starts by containing an initial bath of glass that is of small volume (a starter) and it is subsequently fed both with waste and with substances for forming a bath of glass. Said waste and said glass-forming substances are also advantageously introduced as a mixture ... with the waste being treated as one of the precursors of substances for making said bath of glass. The reactor is thus fed

continuously with waste and with substances for forming the bath of glass, and indeed with additives therefor. Once a certain level has been reached, both types of feed are stopped and the resulting bath of glass can be emptied out.

5 In a preferred variant implementation of the method of the invention, the oxygen which is injected into the bath of glass is introduced into the reactor beneath the surface of said bath of glass. Thus, the means for injecting said oxygen do not pass through the gas phase in said reactor, and are therefore subject to one type of corrosion only: the corrosion inherent to said bath of glass.

10 This type of comment applies to any device that is to penetrate into said bath of glass in order to deliver any substance (injecting oxygen has just been mentioned) or to measure any parameter therein (such as temperature, redox potential, ...). Thus, any device for penetrating into said bath of glass is advantageously introduced into the reactor from beneath the surface of said bath of glass so as to avoid coming into any contact with the gas phase.

15 There follows a general description in method terms of the secondary improvements of the present invention.

20 The method of the invention which comprises injecting oxygen into the bath of glass is advantageously implemented together with cooling of the walls of the reactor and/or, preferably, of the means introduced into said reactor, both in said gas phase and in the bath of glass, which means are introduced in particular for feeding said reactor with the waste to be incinerated and vitrified, for feeding the reactor with oxygen both in its gas phase (said oxygen being used as an oxidizer) and in said bath of glass (said oxygen then acting as an oxidant for adjusting the redox potential of said bath of glass and advantageously for stirring purposes).

25 This list of means that are advantageously cooled is not limiting. For example, it could include means for measuring the temperature of the gas phase, means for measuring the temperature of the bath of glass, means for measuring the redox potential of said bath of glass, means for measuring the level of said bath of glass,

30 Such cooling is intended above all to provide said walls and said means with protection from corrosion. It is also appropriate to preserve the sealing devices installed in the passages through said walls.

35 In the structure of the device for feeding the reactor with waste, it is advantageous to implement dual cooling:

- first cooling of the device on its gas phase side (outside face); and
- second cooling of the same device, generally independent of the first, on its waste intake side (inside face).

Said first cooling is intended above all to protect said device from the corrosion that occurs due to coming into contact with the gas phase; said second cooling is intended above all to minimize the amount of heat transferred to the incoming waste, in order to minimize vaporizing liquid waste and to avoid solid waste sticking together, since that can lead to the feeder device becoming clogged.

In order to cool the walls of the reactor and the various means that are introduced into said reactor, it is conventional to make use of cooling fluids, generally cooling liquids. Said walls and said means have circuits for circulating such fluids applied thereto. In a particularly preferred variant of implementation of said cooling, provision is made at least in the walls that come into contact with the gas phase and/or at least in the means introduced into the reactor and coming into contact with said gas phase for at least one cooling fluid to circulate, said fluid being maintained at a temperature that is above the dew point of said gas phase. In this advantageous variant, the idea is to prevent any condensation of said gas phase on said walls and on said outside surfaces of said means. The phenomenon of condensation is clearly harmful, given the problems of corrosion. It can also give rise to electric arcing, and can thus raise serious problems when the bath of glass is heated by induction. In this advantageous variant, it is possible to use a "hot" cooling fluid constituted by superheated water.

The dual cooling referred to above as being advantageously implemented in the device for feeding waste to the reactor is implemented in a particularly preferred variant by using such a "hot" cooling fluid (at a temperature greater than the dew point of the gas phase to which it passes), at least for cooling said device where it is adjacent to the gas phase (the first above-mentioned cooling). Said second cooling beside waste intake can make use of such a "hot" cooling fluid only when the waste concerned can withstand the temperature of such a "hot" fluid. As a general rule, said second cooling is implemented with a "cold" cooling fluid, such as water at ambient temperature.

In the method of the invention, in order to heat and maintain the bath of molten glass at a suitable temperature, use can be made of various techniques. Thus, said bath of glass can be heated by induction, by means of a flame, by using a plasma torch, or by means of electrodes dipped into the bath. It is not

impossible to use a plurality of said techniques in combination. Induction heating is preferred; induction heating implemented in a cold crucible is most particularly preferred.

5 The method of the invention as described above and below with reference to the accompanying figures is particularly suitable for processing radioactive waste by direct vitrification.

Said method of the invention is generally implemented with waste being fed in continuously; said waste being introduced above the surface of the bath of glass, possibly mixed with substances suitable for constituting said bath of glass.
10 After a fill has been incinerated and after the ash generated thereby has been digested in the bath of glass, said bath of filled glass is emptied out. Thus, the usual situation is continuous feed (or continuous building up of filler), with emptying out being performed discontinuously.

Nevertheless, in implementing the invention, the following can apply.

15 The reactor can be fed with waste and oxygen in a manner that is advantageously optimized so as to ensure maximum combustion of said waste while ensuring that the combustion gases entrain a minimum amount of said waste, whether burnt or unburnt. Such optimization relies on combined mastery of numerous parameters, some of which are mentioned above, and in particular mastery of the following:

- the size of said waste;
 - the quantity of oxygen delivered;
 - the level at which waste is introduced relative to the surface of the bath of glass (advantageously, provision is made to regulate the waste introduction level by regulating the introduction depth of the device for feeding said waste into the reactor); and
 - the quality of the waste/oxygen mixture, when introducing said waste.
- 25 Said waste is advantageously introduced while immersed in oxygen. For this purpose, at least one oxygen feed circuit is advantageously included in the structure of the device for feeding said waste.
30

There follows a description in general terms of the second aspect of the present invention, namely apparatus for processing organic waste in the form of divided solids and/or liquids by incineration and by vitrification; which apparatus is suitable for implementing the above-described method. In conventional
35 manner, said apparatus comprises a reactor, associated firstly with heater means

suitable for maintaining a bath of molten glass in the bottom of said reactor, and secondly fitted with the following means:

- means for emptying said bath of molten glass;
- a device for feeding it with waste to be incinerated and vitrified, said device opening out above the surface of said bath of molten glass and its depth of introduction into said reactor advantageously being adjustable;
- oxygen feed means delivering said oxygen above the surface of said bath of molten glass (to implement incineration); and
- at least one combustion gas outlet formed in the top portion of said reactor well above the surface of said bath of molten glass (in order to minimize entraining ash).

Said apparatus, in characteristic manner, is also fitted with means for injecting oxygen into said bath of molten glass.

Said means are advantageously introduced into the bottom portion of the reactor, beneath the surface of the bath of glass so that they do not come into contact with the gas phase, thereby being subjected to one type of corrosion only (that developed by the bath of glass).

Said means are also advantageously arranged in such a manner that on ceasing to feed them with oxygen, they do not constitute a plug of glass at their open end. Thus, said means for injecting oxygen into said bath of glass are advantageously disposed vertically through the bottom (of the bottom plate) of the reactor, and provided with an opening disposed at 90° to the vertical axis.

The essential elements of the apparatus of the invention, necessary for implementing the intended method of incineration and vitrification are those specified above. Other elements can accompany said elements, for example means for measuring the temperature of the gas phase, means for measuring the temperature of the bath of molten glass, means for measuring the level of said bath of molten glass, means for measuring the level of said bath of glass, means for measuring the redox potential of said bath of molten glass,

In general terms, it has been found advantageous to cool all of the means that are introduced into said reactor (into the gas phase and into the bath of glass). Thus, in an advantageous embodiment of the apparatus of the invention, all of said means introduced into the reactor, and in particular the device for feeding said reactor with waste, the means for feeding the gas phase with oxygen, and the means for injecting oxygen into said bath of glass, include within their structure at

least one circuit for circulating a cooling fluid. Said device for feeding said reactor with waste includes, advantageously embedded in the thickness thereof, at least two generally independent circuits of said type, comprising at least one for cooling its thickness together with its outside surface (in order to minimize problems of corrosion), and at least one other for cooling its inside surface (in order to transfer a minimum amount of heat to the incoming waste). Said feeder device generally presents a tubular structure which is defined by an inside surface and an outside surface.

With reference to said feeder device, it can also have the following additions. It advantageously includes in its structure means for conveying and delivering oxygen to its open end (above the bath of glass). Delivery of said oxygen can be provided in particular by means of a torus arranged around the open end of said device, said torus being pierced by suitable orifices, appropriately distributed. Contact between the waste and the oxygen (oxidizer) can thus be optimized.

The inlets and outlets for the cooling fluids advantageously circulated through the structure of the device for feeding the reactor with waste, and also through the oxygen inlet, likewise advantageously circulated through said structure, are connected to appropriate delivery and removal units. The distribution of said fluids and said oxygen in their respective circulation circuits within said feeder device is advantageously organized by means of a set of distribution chambers and channels, suitably arranged.

Advantageously, the reactor is also cooled. Its walls are advantageously of the double-walled type, so as to allow a cooling fluid to circulate therein.

The heater means associated with said reactor can be of various types, and in particular can be suitable for implementing induction heating, flame heating, plasma torch heating, or heating by means of immersed electrodes. In a particularly preferred variant embodiment, the reactor used is a cold crucible and said heater means are induction heater means.

The invention is described below in its method and apparatus aspects with reference to the accompanying figures:

Figure 1 is a diagrammatic view showing how apparatus of the invention operates.

Figure 2 is a section view in more detail showing apparatus of the same type.

Figure 3 is a detailed section view of means for injecting oxygen into the bath of glass.

Figure 4 is a detailed section view of the waste feeder device.

In Figures 1 to 4, the same references are used to designate the same
5 elements, whether shown in diagrammatic or detailed manner.

The apparatus of the invention is suitable for processing waste D by incineration and vitrification, i.e. by direct vitrification, and it comprises a reactor 1 associated with heater means 2. Said heater means 2 shown in Figures 1 and 2 are suitable for performing induction heating. Within said reactor 1, there can be
10 found a bath of molten glass V surmounted by the gas phase G (Figure 1).

The method of the invention is summarized with reference to Figure 1.

The waste D is fed into the reactor 1 via a waste feeder device 5. The waste is decomposed on the surface S of the bath of molten glass V. The gas that results from this decomposition burns on coming into contact with oxygen which
15 is delivered mainly by means 6. Figure 1 shows a single means 6 for delivering oxygen into the gas phase. Advantageously there are at least two such means disposed symmetrically about said feeder device 5 for feeding said waste D. This is intended to optimize contact between waste D and oxygen in order to optimize combustion of said waste D.

The ash that is generated falls into the bath of glass V. At the surface S of said bath V, there is generally to be found a mass of waste that is in the process of decomposing.
20

In the upper portion of said reactor 1, there is provided an outlet 7 for the combustion gases. Beneath the bottom of said reactor 1, there are means 4 for emptying out the bath of glass V. Said means 4 are capable, in alternation, of
25 closing and of opening an emptying orifice provided in the bottom of said reactor 1.

In characteristic manner, said bottom of said reactor 1 has means 8 passing therethrough for injecting oxygen into the bath of glass V. Said injector means 8
30 are disposed vertically and have an opening 82 at 90° relative to their vertical axis. Figure 1 shows an advantageous variant implementation of the method of the invention.

Finally, Figure 1 shows that the walls 3 and 3' of said reactor 1 are of the double-walled type. Since the reactor 1 is designed as two portions, its wall in its
35 bottom portion is referenced 3, while its wall in its top portion is referenced 3'.

Within each of these two walls 3 and 3', circulation of a cooling fluid is organized. For the wall 3, said fluid arrives via 10 and leaves via 11, while for the wall 3', it arrives via 12 and leaves via 13.

Figure 2 shows each of the elements referenced in Figure 1 in greater detail (with the exception of the cooling fluid inlet 12 for circulating cooling fluid in the top wall 3' of the reactor 1).

For a more detailed description of the means 8 for injecting oxygen into the bath of glass, reference should be made to the description below concerning Figure 3.

For a more detailed description of the device 5 for feeding the reactor with waste D, reference should be made to the description below concerning Figure 4.

Figure 2 shows two means 6 designed to feed the gas phase with oxygen (oxidizer). These means are constituted by blowpipes. Within the structure of each of said blowpipes 6, there is provided a circuit 16 for circulating a cooling fluid. The blowpipes which are cooled in this way withstand corrosion better. It is recalled at this point that they are advantageously cooled by circulating a "hot" cooling fluid (i.e. a fluid maintained at a temperature which is higher than the dew point of the gas phase through which said they pass), thereby preventing any condensation on the outside surfaces thereof.

Figure 3 thus shows means 8 for injecting oxygen into the bath of glass. Said means 8 comprise a circuit 81 for feeding oxygen. The flow of oxygen in said circuit 81 is represented by white arrows. The oxygen is delivered at 82 via an opening that is disposed at 90° to the axis of said means 8.

In their structure, said means 8 include a circuit 83 + 83' for circulating a cooling fluid. Its portion which penetrates into the bath of glass can thus be cooled. Said cooling fluid arrives via 83 and leaves, having picked up heat, via 83'. Circulation of cooling fluid is represented by black arrows.

Finally, Figure 4 shows a particularly advantageous embodiment of the device 5 for feeding the reactor 1 with waste D. Said device 5 has tubular structure defined by an outside surface 50 and an inside surface 50'.

In the thickness of said device there are to be found:

- at least one circuit 51 for circulating a cooling fluid for cooling said structure and mainly for cooling its outside face 50. The circulation of the cooling fluid is represented by black arrows;

- at least one circuit 52 for circulating a cooling fluid that is to cool said inside surface 50'. The circulation of said cooling fluid is represented by white arrows; and

5 - at least one circuit 53 + 54 for conveying and delivering oxygen to the end 55 of said device 5. Said oxygen is thus delivered all around said end 55 via a torus 54. Said torus 54 has orifices of appropriate dimensions suitably distributed to deliver said oxygen in optimized manner. This further optimizes contact between waste D and oxygen. Said oxygen as delivered via the waste feeder
10 device 5 is delivered in addition to the oxygen delivered by the means 6 (see Figures 1 and 2).

Finally, it is recalled that the cooling fluid circulating in the circuit 51 is advantageously constituted by a "hot" cooling fluid.

CLAIMS

1. A method of processing organic waste (D) in divided solid and/or liquid form, the method being implemented in a single reactor (1) containing a bath of molten glass (V) surmounted by a gas phase (G), the method comprising incinerating said waste (D) in the presence of oxygen at the surface (S) of said bath of molten glass (V), and in vitrifying said incinerated waste (D) in said bath of molten glass (V), the method being characterized in that in addition to the oxygen delivered as oxidizer into said gas phase (G), oxygen is also injected into said bath of molten glass (V) in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V); advantageously in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V) and also to subject said bath of glass (V) to moderate stirring.
2. The method according to claim 1, characterized in that said oxygen injected into said bath of glass (V) is introduced into said reactor (1) beneath the surface (S) of said bath of glass (V).
3. The method according to claim 1 or claim 2, characterized in that it is implemented with cooling of the walls (3, 3') of said reactor (1) and/or of the means (5, 6, 8) introduced into said reactor (1) in said gas phase (G) and in said bath of glass (V), in particular for feeding said reactor (1) with said waste (D) and with oxygen.
4. The method according to claim 3, characterized in that it is implemented with dual cooling of the device (5) for feeding said waste (D) to said reactor (1): first cooling of said device (5) on its side passing through the gas phase (G), and second cooling of said device (5) on its side where said waste (D) arrives.
5. The method according to claim 3 or claim 4, characterized in that said walls (3, 3') of said reactor (1) in contact with said gas phase (G) and/or said means (5, 6) introduced into said reactor (1) in contact with said gas phase (G) are cooled by circulation of at least one cooling fluid maintained at a temperature that is higher than the dew point of said gas phase (G).

6. The method according to any one of claims 1 to 5, characterized in that said bath of glass (V) is heated by induction, by flame, by plasma torch, or by means of electrodes dipped therein.

5 7. The method according to any one of claims 1 to 6, characterized in that it is implemented in a cold crucible heated by induction.

8. The method according to any one of claims 1 to 7, characterized in that it is implemented to process radioactive waste.

10

9. An apparatus for processing organic waste (D) in divided solid and/or liquid form by incineration and by vitrification, the apparatus comprising a reactor (1) associated with heater means (2) suitable for maintaining a bath of molten glass (V) in the bottom of said reactor (1), and fitted with:

15

- means (4) for emptying out said bath of molten glass (V);
- a device (5) for feeding said waste (D) to be incinerated and vitrified, said device (5) opening out above the surface (S) of said bath of molten glass (V);
- means (6) for feeding oxygen, delivering said oxygen above the surface (S) of said bath of molten glass (V); and

20

- at least one combustion gas outlet (7) provided in the top portion of said reactor (1) well above the surface (S) of said bath of molten glass (V);

the apparatus being characterized in that said reactor (1) is further equipped with means (8) for injecting oxygen into said bath of molten glass (V).

25

10. The apparatus according to claim 9, characterized in that said means (8) for injecting oxygen into said bath of glass (V) are introduced into the bottom portion of said reactor (1) beneath the surface (S) of said bath of glass (V).

30

11. The apparatus according to claim 9 or claim 10, characterized in that said means (8) for injecting oxygen into said bath of glass (V) are disposed vertically, passing through the bottom of said reactor (1) and presenting an outlet (82) at 90° to their vertical axis.

35

12. The apparatus according to any one of claims 9 to 11, characterized in that the means introduced into said reactor (1), including said device (5) for feeding said

waste (D), said means (6) for feeding oxygen, and said means (8) for injecting oxygen, include at least one circuit (51, 52; 61; 83 + 83') for circulating a cooling fluid within their structure.

5 13. The apparatus according to claim 12, characterized in that said device (5) for feeding said waste (D) presents a structure that is tubular, being defined by an outside surface (50) and by an inside surface (50'), said structure including in the thickness thereof at least two circuits (51 and 52) for circulating cooling fluids, at
10 least one of said circuits (51) being designed to cool said structure and said outside surface (50) of said feeder device (5), and at least another one of said circuits (52) being designed to cool said inside surface (50') of said feeder device (5).

14. The apparatus according to any one of claims 9 to 13, characterized in that the
15 walls (3, 3') of said reactor (1) are of the double-walled type, to allow a cooling fluid to circulate.

15. The apparatus according to any one of claims 9 to 14, characterized in that
20 said reactor (1) is a cold crucible, and in that said heater means (2) are means for induction heating.

A B S T R A C T

METHOD AND APPARATUS FOR INCINERATING AND VITRIFYING
WASTE, IN PARTICULAR RADIOACTIVE WASTE

5

The present invention provides a method of processing organic waste (D) in divided solid and/or liquid form, the method being implemented in a single reactor (1) containing a bath of molten glass (V) surmounted by a gas phase (G), the method comprising incinerating said waste (D) in the presence of oxygen at the surface (S) of said bath of molten glass (V), and in vitrifying said incinerated waste (D) in said bath of molten glass (V). In said method, and in characteristic manner, in addition to the oxygen delivered as oxidizer into said gas phase (G), oxygen is also injected into said bath of molten glass (V) in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V); advantageously in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V) and also to subject said bath of glass (V) to moderate stirring. The present invention also provides apparatus for processing organic waste (D) in divided solid and/or liquid form by incineration and vitrification, the apparatus being suitable for implementing said method.

20

CLAIMS

1. A method of processing organic waste (D) in divided solid and/or liquid form, the method being implemented in a single reactor (1) containing a bath of molten glass (V) surmounted by a gas phase (G), the method comprising incinerating said waste (D) in the presence of oxygen at the surface (S) of said bath of molten glass (V), and in vitrifying said incinerated waste (D) in said bath of molten glass (V), the method being characterized in that in addition to the oxygen or the oxygen-containing gas delivered as oxidizer into said gas phase (G), oxygen or oxygen-containing gas is also injected into said bath of molten glass (V) in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V); advantageously in a quantity that is sufficient to minimize or to avoid any formation of metal within said bath of glass (V) and also to subject said bath of glass (V) to moderate stirring; the means (8) used for said injection being cooled and arranged in such a manner that on ceasing said injection, they do not constitute a plug of glass at their open end.

2. The method according to claim 1, characterized in that said oxygen or oxygen-containing gas injected into said bath of glass (V) is introduced into said reactor (1) beneath the surface (S) of said bath of glass (V).

3. The method according to claim 1 or claim 2, characterized in that it is implemented with cooling of the walls (3, 3') of said reactor (1) and/or of the means (5, 6), other than said means (8) for injecting oxygen or oxygen-containing gas into said bath of glass (V), introduced into said reactor (1) in said gas phase (G) and in said bath of glass (V), in particular for feeding said reactor (1) with said waste (D) and with oxidizer.

4. The method according to claim 3, characterized in that it is implemented with dual cooling of the device (5) for feeding said waste (D) to said reactor (1):

first cooling of its thickness and of its outside surface (50), designed to protect it from corrosion; and

second cooling of its inside surface (50'), designed to minimize the heat transferred to the incoming waste (D).

5. The method according to claim 3 or claim 4, characterized in that said walls (3, 3') of said reactor (1) in contact with said gas phase (G) and/or said means (5, 6) introduced into said reactor (1) in contact with said gas phase (G) are cooled by

circulation of at least one cooling fluid maintained at a temperature that is higher than the dew point of said gas phase (G).

5 6. The method according to any one of claims 1 to 5, characterized in that said bath of glass (V) is heated by induction, by flame, by plasma torch, or by means of electrodes dipped therein.

7. The method according to any one of claims 1 to 6, characterized in that it is implemented in a cold crucible heated by induction.

10

8. The method according to any one of claims 1 to 7, characterized in that it is implemented to process radioactive waste.

15

9. An apparatus for processing organic waste (D) in divided solid and/or liquid form by incineration and by vitrification, the apparatus comprising a reactor (1) associated with heater means (2) suitable for maintaining a bath of molten glass (V) in the bottom of said reactor (1), and fitted with:

20

- means (4) for emptying out said bath of molten glass (V);

- a device (5) for feeding said waste (D) to be incinerated and vitrified, said

device (5) opening out above the surface (S) of said bath of molten glass (V);

- means (6) for feeding oxygen or oxygen-containing gas, delivering said oxygen or said gas above the surface (S) of said bath of molten glass (V); and

- at least one combustion gas outlet (7) provided in the top portion of said reactor (1) well above the surface (S) of said bath of molten glass (V);

25

the apparatus being characterized in that said reactor (1) is further equipped with means (8) for injecting oxygen or oxygen-containing gas into said bath of molten glass (V); said means (8) for injecting said oxygen or said gas into said bath of molten glass (V):

30

being arranged in such a manner that on ceasing to be fed, they do not constitute a plug of glass at their open end; and

including at least one circuit (83 + 83') for circulating a cooling fluid within their structure.

35

10. The apparatus according to claim 9, characterized in that said means (8) for injecting said oxygen or said gas into said bath of glass (V) are introduced into the bottom portion of said reactor (1) beneath the surface (S) of said bath of glass (V).

11. The apparatus according to claim 9 or claim 10, characterized in that said means (8) for injecting said oxygen or said gas into said bath of glass (V) are disposed vertically, passing through the bottom of said reactor (1) and presenting an outlet (82) at 90° to their vertical axis.

5

12. The apparatus according to any one of claims 9 to 11, characterized in that the means introduced into said reactor (1), other than said means (8) for injecting said oxygen or said gas into said bath of molten glass (V), including said device (5) for feeding said waste (D), said means (6) for feeding oxygen or oxygen-containing gas include at least one circuit (51, 52; 61) for circulating a cooling fluid within their structure.

10

13. The apparatus according to claim 12, characterized in that said device (5) for feeding said waste (D) presents a structure that is tubular, being defined by an outside surface (50) and by an inside surface (50'), said structure including in the thickness thereof at least two circuits (51 and 52) for circulating cooling fluids, at least one of said circuits (51) being designed to cool said structure and said outside surface (50) of said feeder device (5), and at least another one of said circuits (52) being designed to cool said inside surface (50') of said feeder device (5).

15

20

14. The apparatus according to any one of claims 9 to 13, characterized in that the walls (3, 3') of said reactor (1) are of the double-walled type, to allow a cooling fluid to circulate.

25

15. The apparatus according to any one of claims 9 to 14, characterized in that said reactor (1) is a cold crucible, and in that said heater means (2) are means for induction heating.



FIG.1

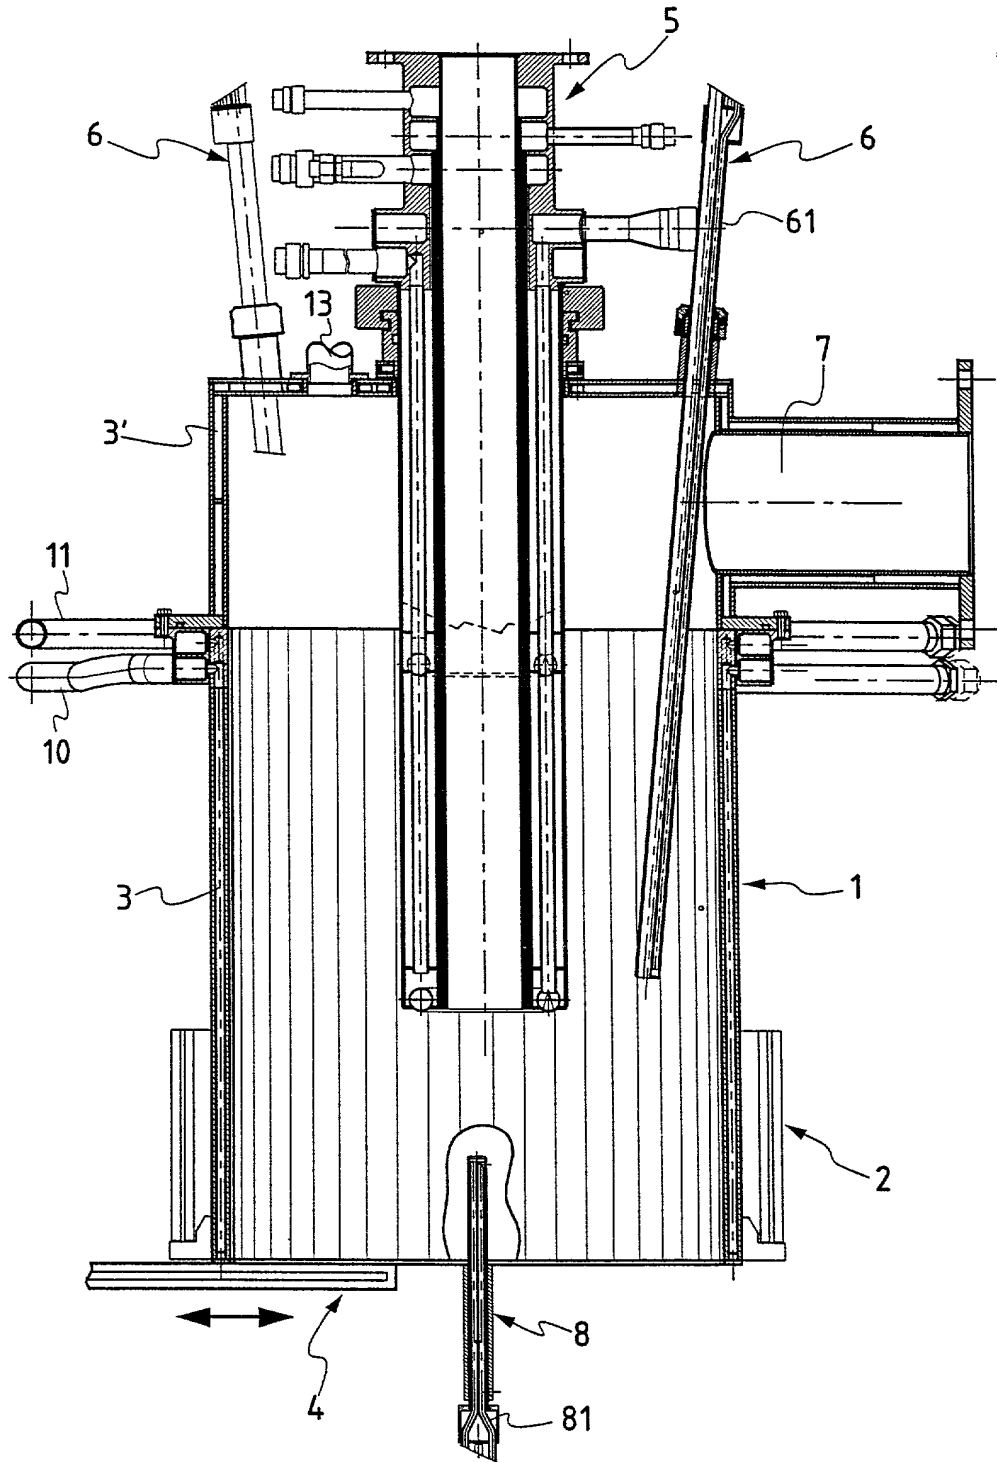
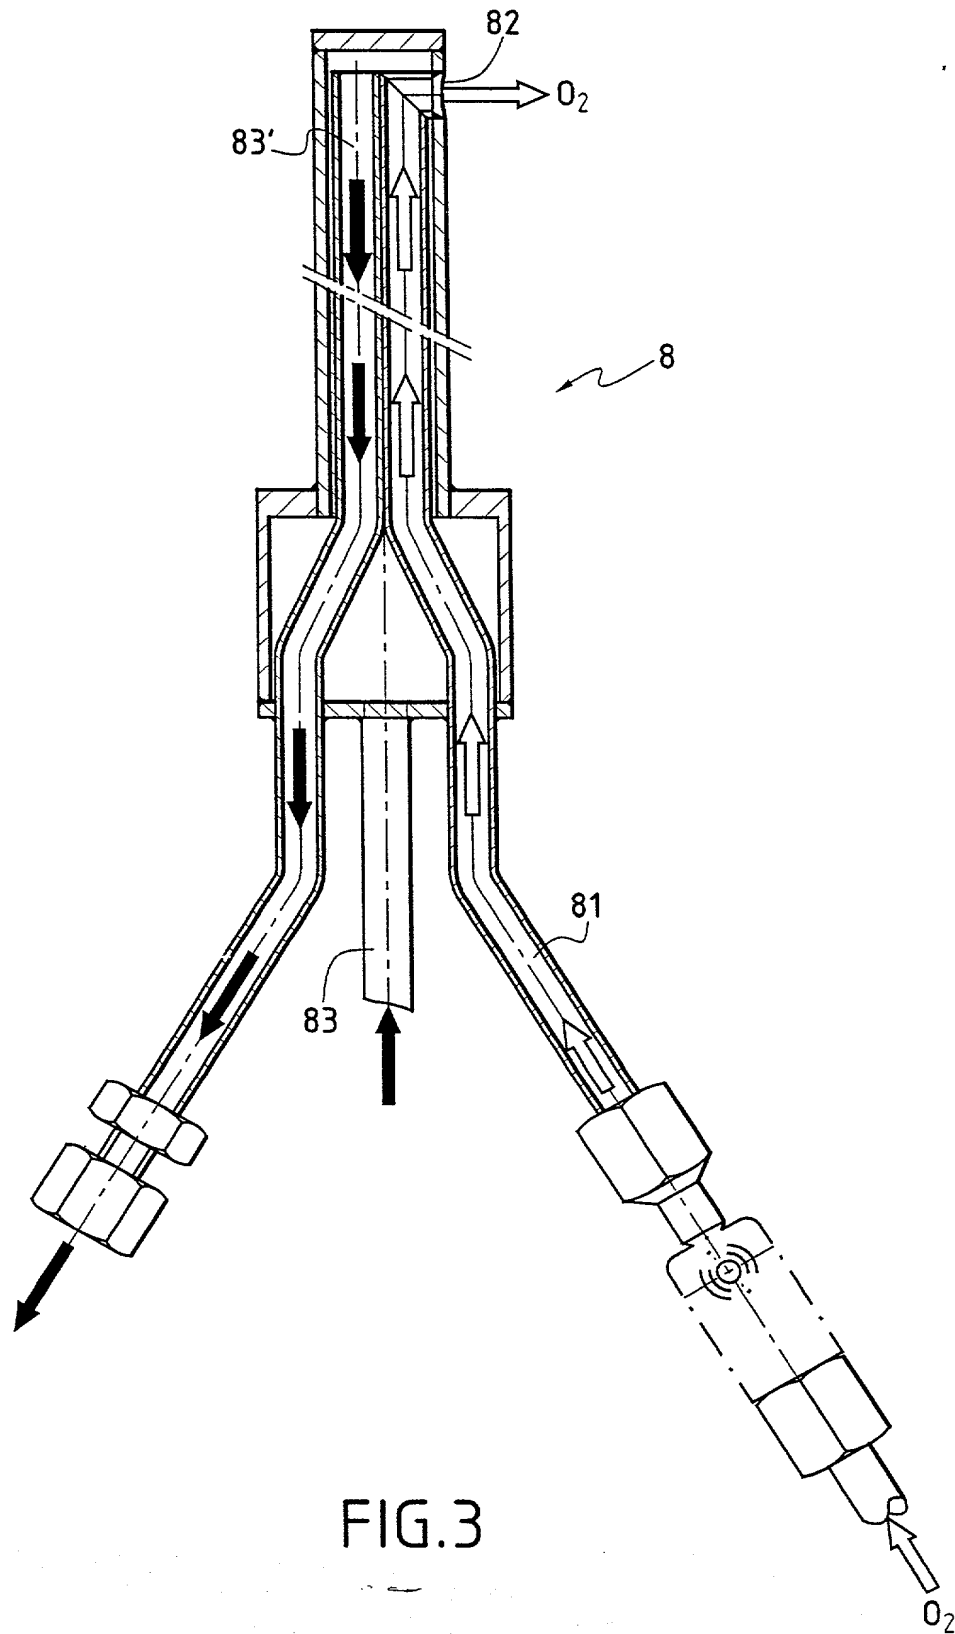


FIG.2



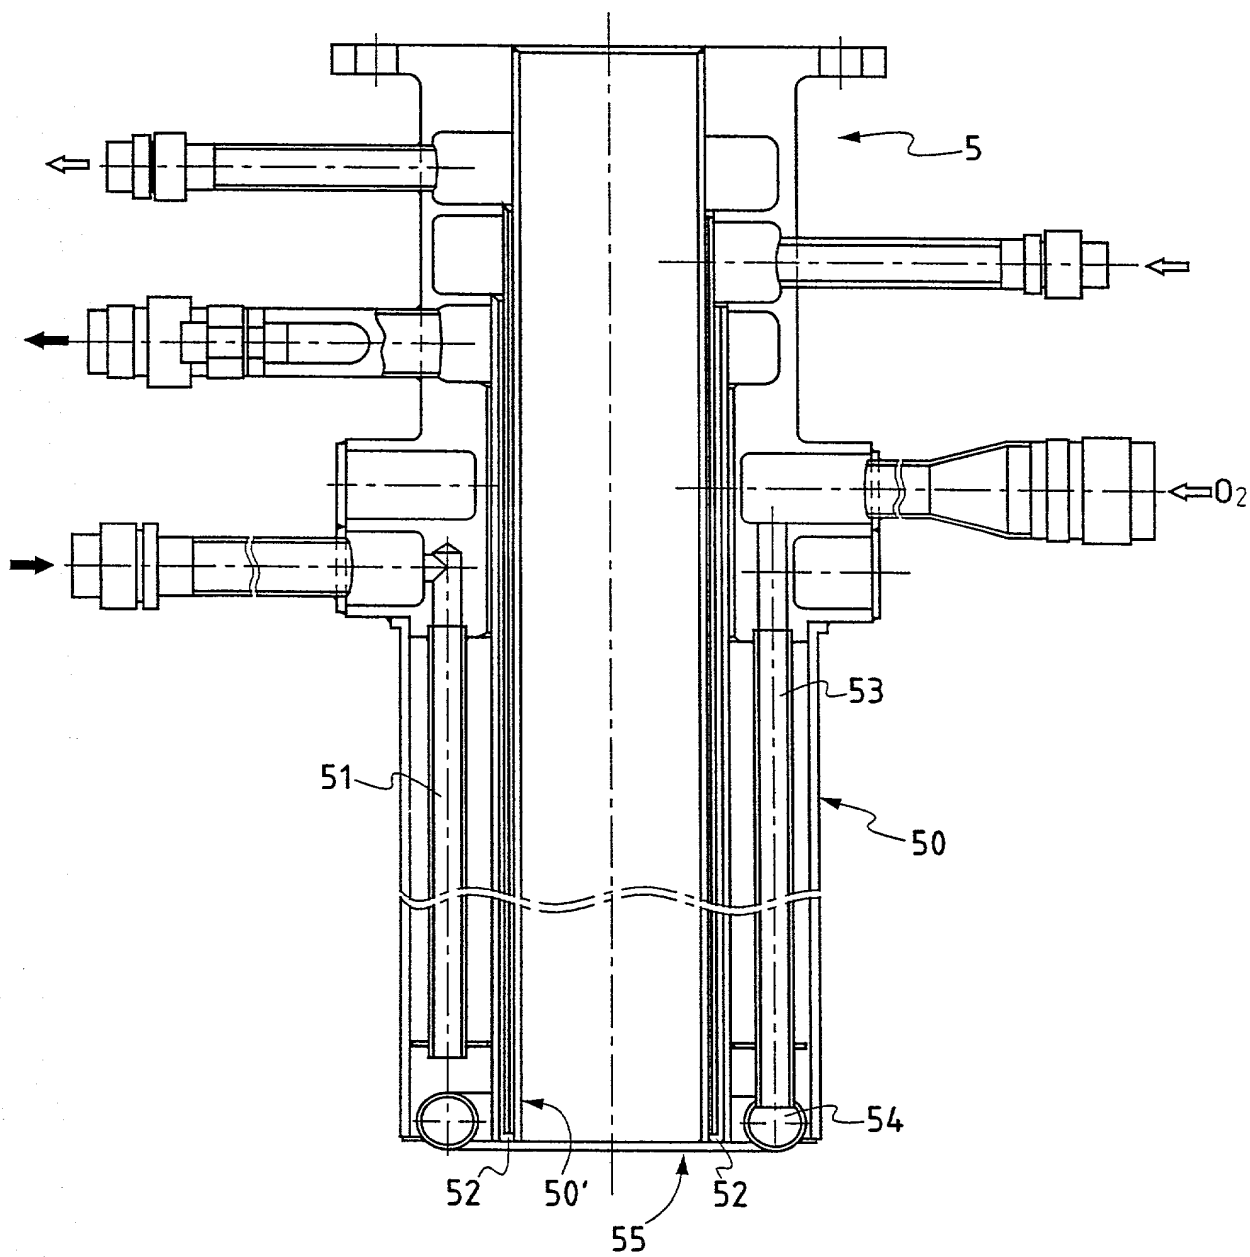


FIG.4

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NUMBER

24648

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Method and apparatus for incinerating and vitrifying waste, in particular
radioactive waste

the specification of which (check only one item below):

☐ is attached hereto.

☐ was filed as United States application

Serial No. _____

on _____,

and was amended

on _____ (if applicable).

☒ was filed as PCT international application

Number PCT/FR99/02977

on December 1st, 1999,

and was amended under PCT Article 19

on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (if PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
Korea	98/052360	01/12/1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
Korea	98/052361	01/12/1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

Combined Declaration For Patent Application and Power of Attorney (Continued)

(Includes Reference to PCT International Applications)


ATTORNEY'S DOCKET NUMBER
24648

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120




U.S. APPLICATIONS		STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT APPLICATION NO	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)		

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)
 Gary M. Nath, Reg. No. 26,965; Irvin A. Lavine, Reg. No. 16,838; Karen Lee Orzechowski, Reg. No. 31,621; Harold L. Novick, Reg. No. 26,011; Suet M. Chong, Reg. No. 38,104; Todd L. Juneau, Reg. No. 40,669; Patricia M. Drost, Reg. No. 29,790; Donald L. Sandler, Reg. No. 19,237, Robert G. Lev, Reg. No. 30,280; and Lee Heiman, Reg. No. 41,827

Send Correspondence to:  020529 PATENT TRADEMARK OFFICE	Send Correspondence to: NATH & ASSOCIATES 6 th Floor 1030 15 th Street, N.W. Washington, D.C. 20005 U.S.A.	Direct Telephone Calls to: (name and telephone number) _____
---	---	--

201	FULL NAME OF INVENTOR	FAMILY NAME <u>BRUNELLOT</u>	FIRST GIVEN NAME <u>Pierre</u>	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY <u>MERIGNAC</u>	STATE OR FOREIGN COUNTRY <u>France</u>	COUNTRY OF CITIZENSHIP <u>France</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>18 Avenue Léon Blum</u>	CITY <u>33700 MERIGNAC</u>	STATE & ZIP CODE/COUNTRY <u>France</u>
202	FULL NAME OF INVENTOR	FAMILY NAME <u>LACOMBE</u>	FIRST GIVEN NAME <u>Jacques</u>	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY <u>PILIAUT</u>	STATE OR FOREIGN COUNTRY <u>France</u>	COUNTRY OF CITIZENSHIP <u>France</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Chemin des Grottes</u>	CITY <u>30131 PUJAUT</u>	STATE & ZIP CODE/COUNTRY <u>France</u>
203	FULL NAME OF INVENTOR	FAMILY NAME <u>MERLIN</u>	FIRST GIVEN NAME <u>Serge</u>	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY <u>IGNY</u>	STATE OR FOREIGN COUNTRY <u>France</u>	COUNTRY OF CITIZENSHIP <u>France</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>43 Allée du Québec</u>	CITY <u>91430 IGNY</u>	STATE & ZIP CODE/COUNTRY <u>France</u>

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

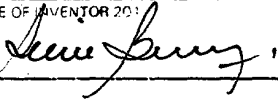SIGNATURE OF INVENTOR 201 	SIGNATURE OF INVENTOR 202 	SIGNATURE OF INVENTOR 203 
DATE May 14, 2001	DATE May 14, 2001	DATE May 14, 2001

204	FULL NAME OF INVENTOR	FAMILY NAME ROUX	FIRST GIVEN NAME Patrice	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY PARIS	STATE OR FOREIGN COUNTRY France	COUNTRY OF CITIZENSHIP France
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 131 Rue Lecourbe	CITY 75015 PARIS	STATE & ZIP CODE/COUNTRY France
205	FULL NAME OF INVENTOR	FAMILY NAME THIEBAUT	FIRST GIVEN NAME Valérie	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY ROQUEMAURE	STATE OR FOREIGN COUNTRY France	COUNTRY OF CITIZENSHIP France
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 17 Rue des Archives	CITY 30150 ROQUEMAURE	STATE & ZIP CODE/COUNTRY France
206	FULL NAME OF INVENTOR	FAMILY NAME CHOI	FIRST GIVEN NAME Kwan-Sik	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
207	FULL NAME OF INVENTOR	FAMILY NAME SONG	FIRST GIVEN NAME Myung-Jae	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
208	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
209	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 204	SIGNATURE OF INVENTOR 205	SIGNATURE OF INVENTOR 206
DATE May 14, 2001	DATE May 14, 2001	DATE
SIGNATURE OF INVENTOR 207	SIGNATURE OF INVENTOR 208	SIGNATURE OF INVENTOR 209
DATE	DATE	DATE

Yusung-ku

204	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
205	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
206	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
207	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
208	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
209	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 204	SIGNATURE OF INVENTOR 205	SIGNATURE OF INVENTOR 206
DATE	DATE	DATE
SIGNATURE OF INVENTOR 207	SIGNATURE OF INVENTOR 208	SIGNATURE OF INVENTOR 209
DATE	DATE	DATE